




The CR snap shackle incorporates the extreme strength, outstanding corrosion resistance, and aerospace quality of Tylaska's high performance racing hardware at a price that the cruiser or casual racer will find appealing.

Unlike many plunger-pin snap shackles that are prone to catching on stays, the sleek geometry of the CR shackle has been optimized to reduce the risk of snagging and fouling.

The locking hole feature allows the plunger pin to be locked in place using a small line or zip tie. Useful in extreme conditions where snap shackles have been known to release due to severe flogging.

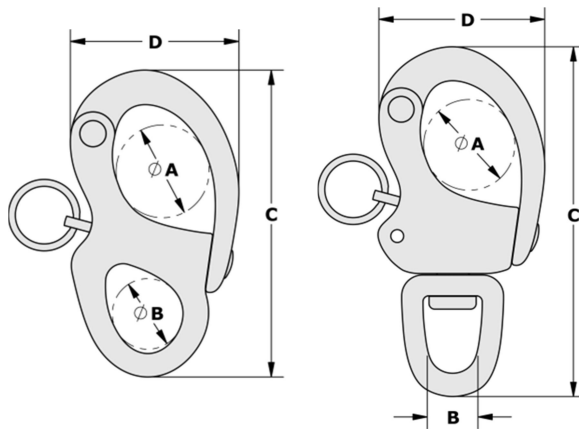

Fixed Bail

Standard Swivel Bail

- AVAILABLE BLACK OXIDE FINISH
- 100% PROOF LOADING TO W.L.L.
- 17-4 PH STAINLESS STEEL
- SUPERIOR CORROSION RESISTANCE
- SLEEK SNAG-RESISTANT GEOMETRY
- CAPTIVE PLUNGER-PIN
- MADE IN USA

Part No.	Description	Bail Type	Finish	Dimensions (in.)				Weight (oz)	Working Load Limit (lb)	Breaking Load (lb)
				A	B	C	D			
TY1102	CR2 Snap Shackle	Fixed	Polished Stainless	.38	.26	1.38	.80	.43	1000	2000
TY1102-BL			Black Oxide							
TY1108-FB	CR8 Snap Shackle	Fixed	Polished Stainless	.96	.74	3.17	1.74	3.5	4410	8820
TY1108-FB-BL			Black Oxide							
TY1108-S	CR8 Snap Shackle	Standard Swivel	Polished Stainless	.96	.54	3.65	1.74	4.5	4410	8820
TY1108-S-BL			Black Oxide							